



DEPLOY.

# ANTI-TORQUE SWIVEL 2-7/8"


CIRCULATING HEAD & SCREEN SUB



## with ADJUSTABLE REACTIVE TORQUE BACKUP

The 2-7/8 Anti-Torque Swivel allows 2-7/8 motors to be used on service rigs without power swivels. It is hydraulically activated to prevent rotation of the drill string which allows rotation in both directions while pumps are disengaged.

Maximum Operating Pressure: 3000 psi  
Maximum Pressure: 3500 psi  
Load Testing Available: 125000 lbs (62.5 US ton)

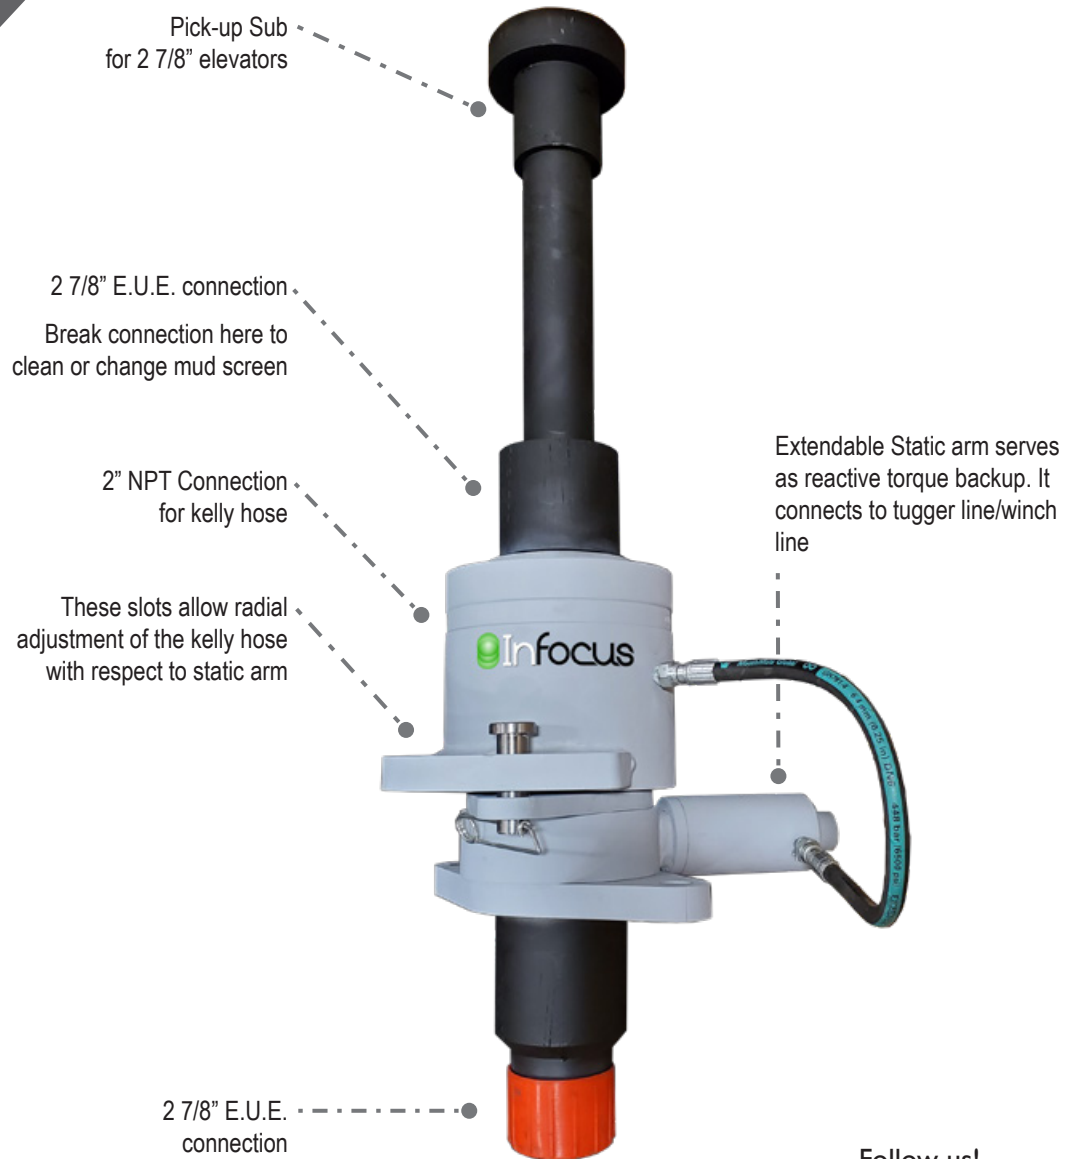

Follow us!

